

**SLR Calculator:
Sea Level Rise (SLR) Inundation Surface Calculator
Add-in for ArcGIS Desktop 10.1**

**Florida Sea Level Scenario Sketch Planning Tool
Version 1.0, October 2013
University of Florida GeoPlan Center
<http://sls.geoplan.ufl.edu>**

Contents

1. Description	2
2. Software Requirements	2
3. Data Inputs Included with Calculator.....	2
3.1. USACE Sea Level Change Projections.....	3
3.2. NOAA Tide Gauge Data	3
3.3. Digital Elevation Model (Option Download).....	4
4. Installing the Calculator	5
4.1. Installation Using Auto ArcGIS Add-In Installation Utility.....	5
4.2. Installation - Manual	5
5. Using the Calculator	6
5.1. Choosing Input Parameters (State, Year, Projection Curve, Tidal Datum)	7
5.2. Choosing Input Parameters (Sea Level Trend Value, Digital Elevation Model)	8
5.3. Choosing Output Parameters.....	9
5.4. Running the Calculator.....	10
5.4.1. Progress Dialog Window & Logging	10
5.4.2. Naming Convention of Output Layers	11
6. Tips & Tricks	12
7. Documents & Resources	12

Please read these instructions carefully. Before using the SLR Calculator, it is recommended that you review the report entitled “Development of a Geographic Information System (GIS) Tool for the Preliminary Assessment of the Effects of Predicted Sea Level and Tidal Change on Transportation Infrastructure”, FDOT Contract # BDK75 977-63, available from the project website: <http://sls.geoplan.ufl.edu/documents/>.

1. Description

The Sea Level Rise (SLR) Inundation Surface Calculator assists users in creating GIS layers representing potentially inundation areas due to various sea level rise scenarios. The calculator uses the U.S. Army Corp of Engineers (USACE) sea level change projection methodology, as specified in Engineer Circular EC 1165-2-212, along with National Oceanic and Atmospheric Administration (NOAA) tide gauge data and sea level trends. For simplicity sake, this User Guide will refer to the calculator as the “SLR Calculator”. The UF GeoPlan Center developed the SLR calculator with funding from the Florida Department of Transportation Office of Policy Planning. The SLR Calculator is part of the Florida Sea Level Scenario Sketch Planning Tool, which was created to facilitate the identification of transportation infrastructure potentially at risk from projected sea level changes.

The SLR calculator is an add-in for ArcGIS Desktop 10.1, which is required to run this tool, along with the Spatial Analyst extension. An add-in is a customized tool or toolbar that can be added to an ArcGIS for Desktop application (i.e. ArcMap, ArcCatalog, etc) to run custom GIS functions. Intermediate GIS expertise is recommended for using the SLR calculator. The add-in calls a python script, which processes the input and output parameters chosen.

2. Software Requirements

ESRI ArcGIS Desktop 10.1, with Spatial Analyst

3. Data Inputs Included with Calculator

The SLR Calculator includes an embedded table of sea level change projections and optionally, the calculator can be downloaded with or without a Digital Elevation Model (DEM). Hence, the SLR calculator can be used with no additional data inputs. Users do have the option of inputting their own DEM for processing inundation surfaces. **However, the vertical units of**

the input DEM must be in inches to correspond with the imbedded sea level change projections table.

3.1. USACE Sea Level Change Projections

The SLR calculator uses the U.S. Army Corp of Engineers (USACE) sea level change projection methodology, as specified in Engineer Circular EC 1165-2-212, along with National Oceanic and Atmospheric Administration (NOAA) Center for Operational Oceanographic Products and Services (COOPS) tide gauge data and sea level trends. Sea level rise projection values were compiled by the GeoPlan Center using the Excel version of the USACE Projection Curve Calculator (available at <http://www.corpsclimate.us/ccaceslcurves.cfm>). **The projection values used in the SLR Calculator are in inches.** Projection rates were calculated for three potential scenarios based on the rate of sea level change: “low” (historic/ linear); “medium” (intermediate/ Curve II) and “high” (Curve III). The historic projection is a linear rate of change assuming a continuation of rates of sea level change reported by NOAA. Intermediate and high projected rates were derived from scenarios originally developed by the NRC and modified by the USACE to account for the most recent IPCC projections and the local rate of vertical land movement (i.e. relative sea level rise).

For more information on the NOAA tide gauge data, see: <http://tidesandcurrents.noaa.gov/>. For more information on the USACE methodology and Engineer Circular EC 1165-2-212, see: <http://www.corpsclimate.us/ccaceslcurves.cfm>.

The embedded table of sea level change projections includes data for 14 Florida tide stations at decadal intervals from 2020 – 2100, three projection curves (low/ medium/ high), and five tidal datums. The sea level change projections were translated to the North American Vertical Datum of 1988 (NAVD88), using the correction unique to each tide station. In addition, the GeoPlan Center created sea level change projections for FDOT Districts using an area weighted mean method which averages data from multiple tide gauges (those gauges which are closest to the corresponding FDOT District). For more information on this process, see the final report entitled “Development of a Geographic Information System (GIS) Tool for the Preliminary Assessment of the Effects of Predicted Sea Level and Tidal Change on Transportation Infrastructure”, FDOT Contract # BDK75 977-63, available from the project website: <http://sls.geoplan.ufl.edu/documents/>

3.2. NOAA Tide Gauge Data

Data from fourteen NOAA tide gauges were used, which currently meet the 40-year minimum data record recommendation per the USACE guidance (2011, p. B-3). The 40-year period covers

two tidal datum epochs which minimizes error in calculating mean sea level trends. An epoch spans a 19-year time period and is considered the official time range over which tide observations and mean values for datums are calculated. The current National Tidal Datum Epoch (NTDE) covers the time period 1983 to 2001.

NOAA Florida Tide Gauge Locations used in SLR Calculator

Station	Station ID	Latitude	Longitude	Year	Mean SLC trend (mm/yr)
Apalachicola	8728690	29° 43.6' N	84° 58.9' W	1967	1.38
Cedar Key	8727520	29° 8.1' N	83° 1.9' W	1914	1.8
Clearwater Beach	8726724	27° 58.7' N	82° 49.9' W	1973	2.43
Daytona Beach Shores ¹	8721120	29° 8.8' N	80° 57.8' W	1925	2.32
Fernandina Beach	8720030	30° 40.3' N	81° 27.9' W	1897	2.02
Fort Myers	8725520	26° 38.8' N	81° 52.2' W	1965	2.4
Key West	8724580	24° 33.3' N	81° 48.4' W	1913	2.24
Mayport	8720218	30° 23.8' N	81° 25.8' W	1928	2.29
Miami Beach ¹	8723170	25° 46.1' N	80° 7.9' W	1931	2.39
Naples	8725110	26° 7.9' N	81° 48.4' W	1965	2.02
Panama City	8729108	30° 9.1' N	85° 40.0' W	1973	0.75
Pensacola	8729840	30° 24.2' N	87° 12.6' W	1923	2.1
St. Petersburg	8726520	27° 45.6' N	82° 37.6' W	1947	2.36
Vaca Key	8723970	24° 42.7' N	81° 6.3' W	1971	2.78
¹ not currently in operation					

3.3. Digital Elevation Model (Option Download)

The SLR calculator can be downloaded with or without a Digital Elevation Model (DEM) dataset. Depending on the download package you selected, the zip included either a DEM for the entire State of Florida or a DEM clipped to one of the seven FDOT Districts.

The DEM was compiled by the UF GeoPlan Center by mosaicking the best available data from four different sources in order to get coverage for the State of Florida. The process steps are described in detail in the metadata included with the dataset. In addition, the DEM is available for download from the Florida Geographic Data Library via <http://www.fgdl.org>, under the "Elevation" theme, or by using the "DEM" keyword, with a filename that begins with "FLIDAR_MOSAIC". DEMs are available with vertical units in inches, centimeters, feet and meters. However, a DEM with vertical units in inches must be used with this calculator, as the sea level trend values embedded in the calculator are in inches.

4. Installing the Calculator

After downloading the calculator zip file, navigate to the location of the downloaded file. Then choose one of the following install methods:

4.1. Installation Using Auto ArcGIS Add-In Installation Utility

1. Unzip SLR_Calculator.Zip.
2. Double-click the SLR Calculator .esriaddin File
3. Start Arcmap
4. Add "SLR Toolbar" (Customize --> Toolbars --> Check "SLR ToolBar")
5. Click SLR Calculator button on toolbar to open application window

4.2. Installation - Manual

1. Unzip SLR_Calculator.Zip
2. Open ArcMap
3. Click "Customize" on menu bar
4. Click "Add-In Manager"
5. Select Options Tab
6. Click Add Folder "Add Folder" and browse to folder location of unzipped .esriaddin
7. Select Add-Ins Tab Choose SLR Surface Calculator and Click Customize
8. Check "SLR Toolbar" and Close
9. Click SLR Calculator button on toolbar to open application window

5. Using the Calculator

Six input parameters and two output parameters are required to run the calculator. The input parameters define the Sea Level Scenario(s) for which you are creating inundation layers. The output parameters define the file format and location of where to save the layers.

SLR Calculator Dialog Overview

The screenshot shows the SLR Calculator Dialog box with several sections highlighted and annotated:

- Input Parameters:** A box on the left lists six parameters: State, Year, Projection Curve, Tidal Datum, Sea Level Trend Value, and Digital Elevation Model (DEM). A red arrow points from this box to the corresponding sections in the dialog.
- Click on the arrows to expand/ collapse details for each:** A yellow arrow points to the expand/collapse arrows in the dialog.
- Output Parameters:** A box on the left lists two parameters: Outputs and Output Location. A blue arrow points from this box to the 'Outputs' and 'Output location' sections in the dialog.
- Submit/ Run:** A purple arrow points to the 'Submit' button at the bottom of the dialog.

The dialog box itself contains the following sections:

- State:** A dropdown menu.
- Year(s):** A section titled 'Select Year(s)' with checkboxes for All, 2020, 2030, 2040, 2050, and 2060.
- Projection Curve:** A section titled 'Select USACE Projection Curve(s)' with checkboxes for USACE High Rate, USACE Intermediate (Medium) Rate, and USACE Low Rate (Historic Rate).
- Tidal Datum:** A section titled 'Select Tidal Datum(s)' with checkboxes for All, Mean Lower Low Water, Mean Low Water, Mean Sea Level, Mean High Water, and Mean Higher High Water.
- Sea Level Trend Value:** A section titled 'Select Sea Level Trend Values' with radio buttons for FDOT District and Tide Station, and a dropdown menu for the location (currently set to Appalachicola).
- Digital Elevation Model (DEM):** A section titled 'Choose Digital Elevation Model (DEM)' with an 'Open' button and a 'Select File' text box.
- Outputs:** A section with two sub-sections: 'Inundation Surface' (with checkboxes for Bathtub inundation (Raster) and Inundation with Hydro-connectivity Filter) and 'Inundation with Hydro-connectivity Filter' (with checkboxes for Raster and ArcGIS Feature class - polygon).
- Output location:** A section with a 'Select File Geodatabase' text box and an 'Open' button.
- Submit:** A button at the bottom of the dialog.

5.1. Choosing Input Parameters (State, Year, Projection Curve, Tidal Datum)

State:

Select the State in which you want to create inundation surfaces. Currently, Version 1 of the calculator only includes data for Florida.

Year(s):

Select the time periods (decades) for which inundation surfaces will be created. Decades 2020 – 2100 are available. One or multiple years can be selected. The “All” checkbox will select all decades. For each decade selected, one layer will be created.

Projection Curve:

Select USACE Projection Curve to use for inundation calculation. One or multiple curves can be selected. For each curve selected, one layer will be created.

- USACE High Rate
- USACE Intermediate (Medium) Rate
- USACE Low Rate (Historic Rate)

Tidal Datum: Select the tidal datum(s) which to add the projected sea level change. The tidal datum values are utilized as constant offsets to the sea level change projections calculated for each rate and time period. For each datum selected, one layer will be created.

- Mean Lower Low Water (MLLW): The average of the lower low water height of each tidal day observed over the NTDE.
- Mean Low Water (MLW): The average of all the low water heights observed over the NTDE.
- Mean Sea Level (MSL): The arithmetic mean of hourly heights observed over the NTDE.
- Mean High Water (MHW): The average of all the high water heights observed over the NTDE.
- Mean Higher High Water (MHHW): The average of the higher high water height of each tidal day observed over the NTDE.

For more information on tidal datums, refer to NOAA’s website:

http://tidesandcurrents.noaa.gov/datum_options.html

5.2. Choosing Input Parameters (Sea Level Trend Value, Digital Elevation Model)

The screenshot shows a software interface with two main sections. The first section, titled 'Sea Level Trend Value', contains a sub-section 'Select Sea Level Trend Values' with two radio buttons: 'FDOT District' (unselected) and 'Tide Station' (selected). Below the radio buttons is a dropdown menu currently displaying 'Appalachicola'. The second section, titled 'Digital Elevation Model (DEM)', contains a sub-section 'Choose Digital Elevation Model (DEM)' with an 'Open' button and a 'Select File' text box.

Sea Level Trend Value:

FDOT District: District trend values were calculated using an average weighted mean (AWM) method for each FDOT District. The AWM method summarizes data from the tide stations closest to each FDOT District in order to give a consistent SLR value for that entire district's geographic area. For more information on these methods, see the report referenced in this document: "Development of a Geographic Information System (GIS) Tool for the Preliminary Assessment of the Effects of Predicted Sea Level and Tidal Change on Transportation Infrastructure", FDOT Contract # BDK75 977-63:

Tide Station: Choose a NOAA Florida tide station in order to use the sea level trends associated with that specific tide station. Only one tide station can be chosen at a time.

Digital Elevation Model (DEM)

Select a Digital Elevation Model from which to create the inundation surfaces. As discussed in Section 3 of this User Guide, this calculator can be downloaded with or without a Digital Elevation Model (DEM) dataset. Depending on the download package you selected, the zip included either a DEM for the entire State of Florida or a DEM clipped to one of the seven FDOT Districts.

To choose the DEM included with your download: navigate to the location where you saved the Add-in Zip file. There you will find the "DEM" folder, in which a File Geodatabase (FGDB) with the DEM raster will be located. Select the DEM raster within the FGDB.

Important Note: The DEM determines the spatial extent of the output inundation layers

5.3. Choosing Output Parameters

The output parameters define the file format in which you want to save your inundation layers, and the output location of the inundation layers. The output inundation layers include (1) a bathtub model of inundation and (2) an enhanced inundation model with a hydro-connectivity filter applied. The bathtub method identifies all inland areas with an elevation below that of the SLR projection value as potentially inundated areas due to sea level rise.

The hydrologic connectivity filter attempts to refine the bathtub method by evaluating the relationship of the potentially inundated areas to oceans and connected waterways. The result of the filter is to remove isolated areas, which were identified in the bathtub model but are not as likely to be inundated due to their isolation from the ocean or gulf. For more information and technical methods, please see the final report referenced in this guide.

The bathtub model can only be output to a raster file format. The enhanced inundation model with the hydro-connectivity filter can be output as a raster or as a vector ArcGIS polygon feature class.

Please Note: All output data layers can currently only be saved to a File Geodatabase (FGDB).

Outputs & Output Location

The outputs parameters define the file format and location where to save the output inundation layers. One or multiple output types can be selected.

Check for creation of bathtub inundation model in raster format

Both options here create the enhanced inundation model with hydro-connectivity filter.
 - **Raster:** create raster version
 - **ArcGIS Feature class – polygon:** create vector polygon version

Navigate to the File Geodatabase in which to save the output inundation layers or use the dialog to create an output File Geodatabase.

5.4. Running the Calculator


Once the input and output parameters have been selected, the SLR calculator is ready to run. Simply hit the “Run” button at the very bottom of the calculator under the Submit section. You may need to click on the arrow to the left of “Submit” in order to expand the window and reveal the Run button.



5.4.1. Progress Dialog Window & Logging

Shortly after the calculator is submitted, a progress dialog window will open to show the progress. Please be patient, the process will take some time to complete, depending on the parameters chosen, the geographic extent of the input DEM, and the specifications of your computer (RAM, CPU, etc). If you want to cancel the process, simply hit the “Cancel” button.

Both the progress dialog window and the log file will display the process start time, the process end time, and the elapsed running time. Taking note of these times and the parameters chosen can help you plan for future iterations of the calculator.

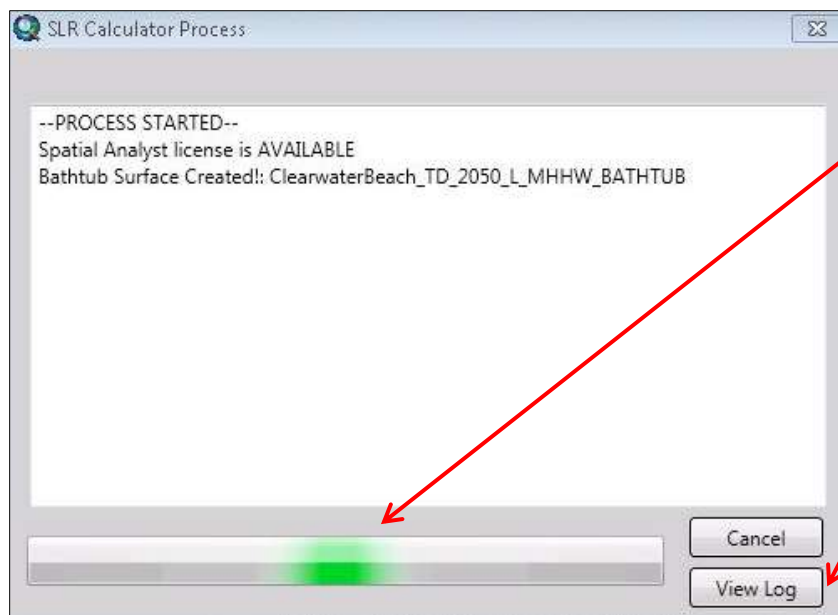

Progress Dialog:

The green arrow at the bottom will show as long as processes are running. The calculator is complete when the green arrow stops AND the dialog says: --PROCESS COMPLETE--

View Log: A log file is created the first time the calculator is run. The log is appended for subsequent runs. If the log is opened before the process is complete, it will need to be reloaded to see the complete details of the log.

5.4.2. Naming Convention of Output Layers

Output inundation layers will be named according to the input and output parameters chosen in the calculator. The parameters will be abbreviated and separated by underscores. No spaces are allowed in the output file names.

Example filenames of Output Layers:

MiamiBeach_2080_M_MHHW_BATHTUB

ClearwaterBeach_2040_H_MSL_SLR_RAS

DISTRICT1_2040_H_MSL_SLR

Output File Naming Convention is as follows:

{STATION or DISTRICT}_{YEAR}_{PROJECTION_CURVE}_{DATUM}_{OUTPUT TYPE}

Where:

- **STATION or DISTRICT:** Tide Station or FDOT District (1-7) chosen for sea level trend value.
- **YEAR:** Decade chosen (2020, 2030, 2040, 2050, 2060, 2070, 2080, 2090 or 2100)
- **PROJECTION CURVE:** USACE Projection Curve chosen
 - H = USACE High Rate
 - M = USACE Intermediate (Medium) Rate
 - L = USACE Low Rate (Historic Rate)
- **DATUM:** Tidal Datum chosen
 - MHHW - Mean Higher High Water
 - MHW - Mean High Water
 - MSL - Mean Sea Level
 - MLW - Mean Low Water
 - MLLW - Mean Lower Low Water
- **OUTPUT TYPE:**
 - BATHTUB – Bathtub inundation model – Raster File Format
 - RAS – Enhanced inundation model with hydro-connectivity filter – Raster File Format
 - SLR – Enhanced inundation model with hydro-connectivity filter – Feature class

6. Tips & Tricks

- No spaces are allowed in filenames
- When processing large amounts of data, the calculator may fail due to memory limitations. Close other intensive applications during processing, or try processing a smaller geographic area.
- The spatial extent of the output inundation layer is dependent upon the input DEM selected. The larger the geographic extent of the DEM, the longer calculator processing will take to complete. If you are working with an area that is smaller than the State of Florida or FDOT District, it is recommended that you clip the DEM to your area of interest to speed up processing time.
- While each input and output parameter is required for the calculator to run, choosing multiple selections (eg. Multiple years, datums, curves) could cause the calculator to take longer to complete.
- Use the log file to see if there were any errors in the process

7. Documents & Resources

Florida Sea Level Scenario Sketch Planning Tool – project website: <http://sls.geoplan.ufl.edu>

Final Report under which this calculator was developed: “Development of a Geographic Information System (GIS) Tool for the Preliminary Assessment of the Effects of Predicted Sea Level and Tidal Change on Transportation Infrastructure”, FDOT Contract # BDK75 977-63: ftp://ftp.sls.geoplan.ufl.edu/pub/sls/docs/FDOT_BDK75_977-63_Final_Technical_Report.pdf

Final Report also available via the project website at: <http://sls.geoplan.ufl.edu/documents>

NOAA COOPS tide gauge data: <http://tidesandcurrents.noaa.gov/>.

USACE methodology and Engineer Circular EC 1165-2-212: <http://www.corpsclimate.us/ccaceslcurves.cfm>.